


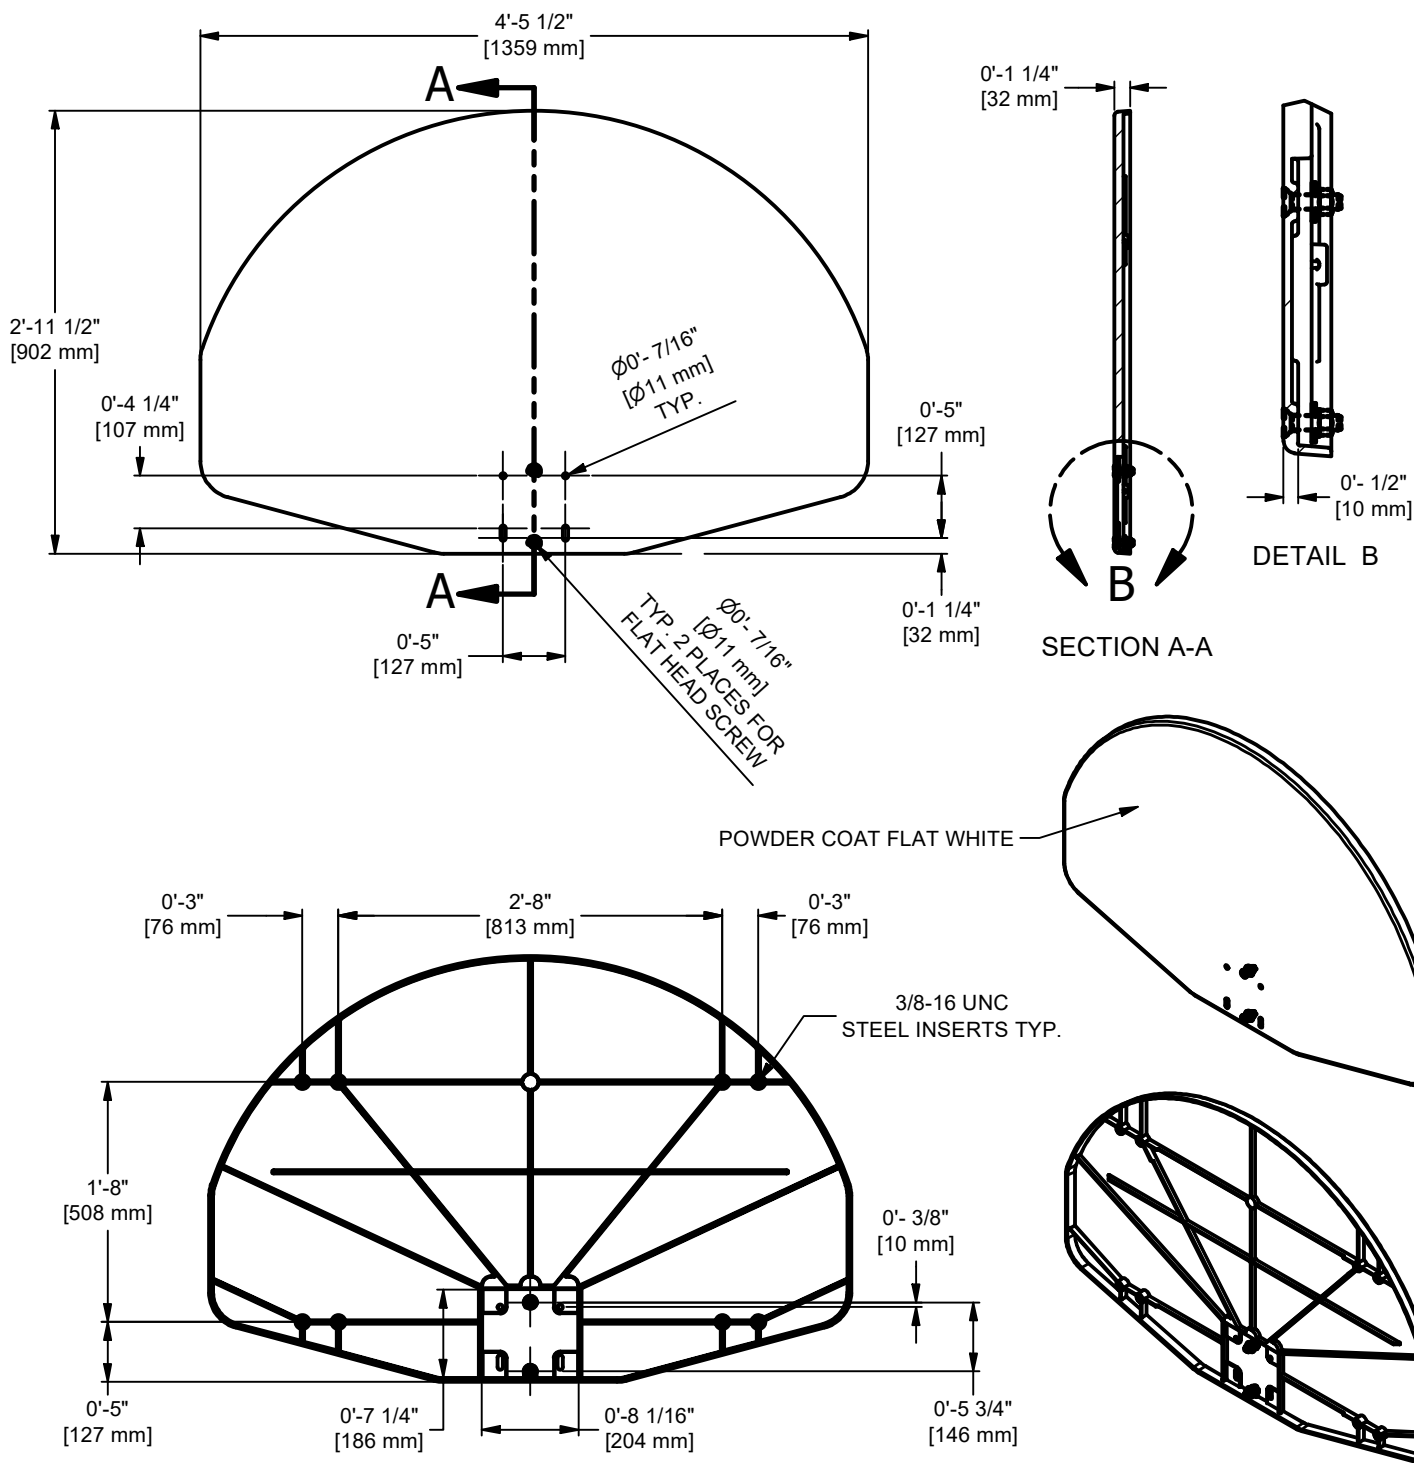

Gared Performance Sports Systems
info@garedperfsports.com
800-325-2682

THIS DOCUMENT CONTAINS TRADE SECRET AND OTHER MATERIALS WHICH ARE PROTECTED BY CONFIDENTIALITY NOTICE AND AGREEMENT AND BY COPYRIGHT. ANY USE OR COPYING OF THIS DOCUMENT EXCEPT AS AUTHORIZED BY GARED PERFORMANCE SPORTS SYSTEMS IS STRICTLY PROHIBITED.

FAN-SHAPED ALUM B/B, NO BORDER

DRAWN	BRC	DATE	8/5/2025	DATE ISSUED	6/23/2025
APPROVED		DATE			
SIZE	A	SCALE	SHT. NO.	PART NO.	REV
			1 OF 2	1750	

R002



PERFORMANCE SPORTS SYSTEMS

MODEL 1750

35-1/2" X 53 1/2" FAN SHAPED ALUMINUM BACKBOARD WITH WHITE POWDER COATED FINISH

The 1750 backboard shall be a one-piece permanent mold, aluminum alloy casting with a 1-1/4" flange around outer edge. Backboard shall have eight mounting holes, which shall be reinforced with cast in-place threaded steel inserts for 3/8-16 bolts. 1/4" wide and 1" deep ribs reinforce the board mounting inserts and the goal mounting holes.

Backboard shall have a 5" horizontal and a slotted vertical goal mounting holes to accommodate hole patterns from 5" vertical to 4.25 vertical.

FINISH

Backboard surface shall have a white powder coated finish.

ACCESSORIES

GOALS

See Goal-Board Matrix specification sheet for goal compatibility.

NOTICE

PROPER TIGHTENING OF FASTENERS IS IMPORTANT TO ASSURE ALL COMPONENTS HAVE BEEN INSTALLED AND SECURED CORRECTLY. THE FOLLOWING TABLE LISTS THE RECOMMENDED TIGHTENING TORQUE FOR BOLTS USED IN THE INSTALLATION. DURING THE INSTALLATION TIGHTEN ALL BOLTS TO THE RECOMMENDED TIGHTENING TORQUE LISTED IN THE TABLE UNLESS OTHERWISE SPECIFIED IN THE ASSEMBLY INSTRUCTIONS.

RECOMMENDED BOLT TORQUE

BOLT SIZE	WRENCH SIZE	Inch-Pounds	Foot-Pounds
1/4	7/16	66 to 90	5.5 to 7.5
5/16	1/2	132 to 180	11 to 15
3/8	9/16	234 to 318	19.5 to 26.5
7/16	11/16		31 to 42.5
1/2	3/4		47 to 65
9/16	7/8		68 to 90
5/8	15/16		94 to 130
3/4	1 1/8		166 to 230
7/8	1 5/16		269 to 372
1	1 1/2		402 to 566