


PARTS LIST

UNITS	REF.	DESCRIPTION
(4)	#1	Poles, 10-3/4"OD x 0.375 Wall Coated Black
(3)	#2	Backstop Netting Panels
500'	#3	1/4" GAC Cable
(8)	#4	1/2" x 12" Long Eyebolts
(4)	#5	TB-12 Turnbuckles (for horizontal cables)
(4)	#6	TB-6 Turnbuckles (for vertical cables)
(30)	#7	1/4" Cable Clamps
(400)	#8	8 mm Carabiner Clips

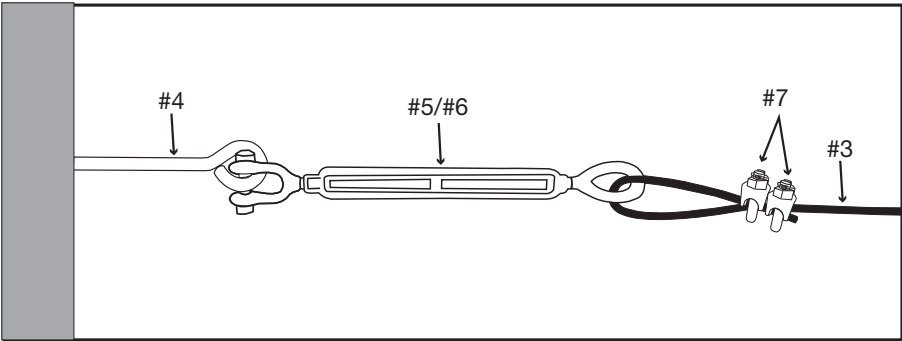

NOTE: (IF INSTALLING WITH A WALL)

- Eyebolts are recommended every 3' - 4' on top of wall to anchor bottom cable
- Wall and hardware/eyebolts for wall are not included

