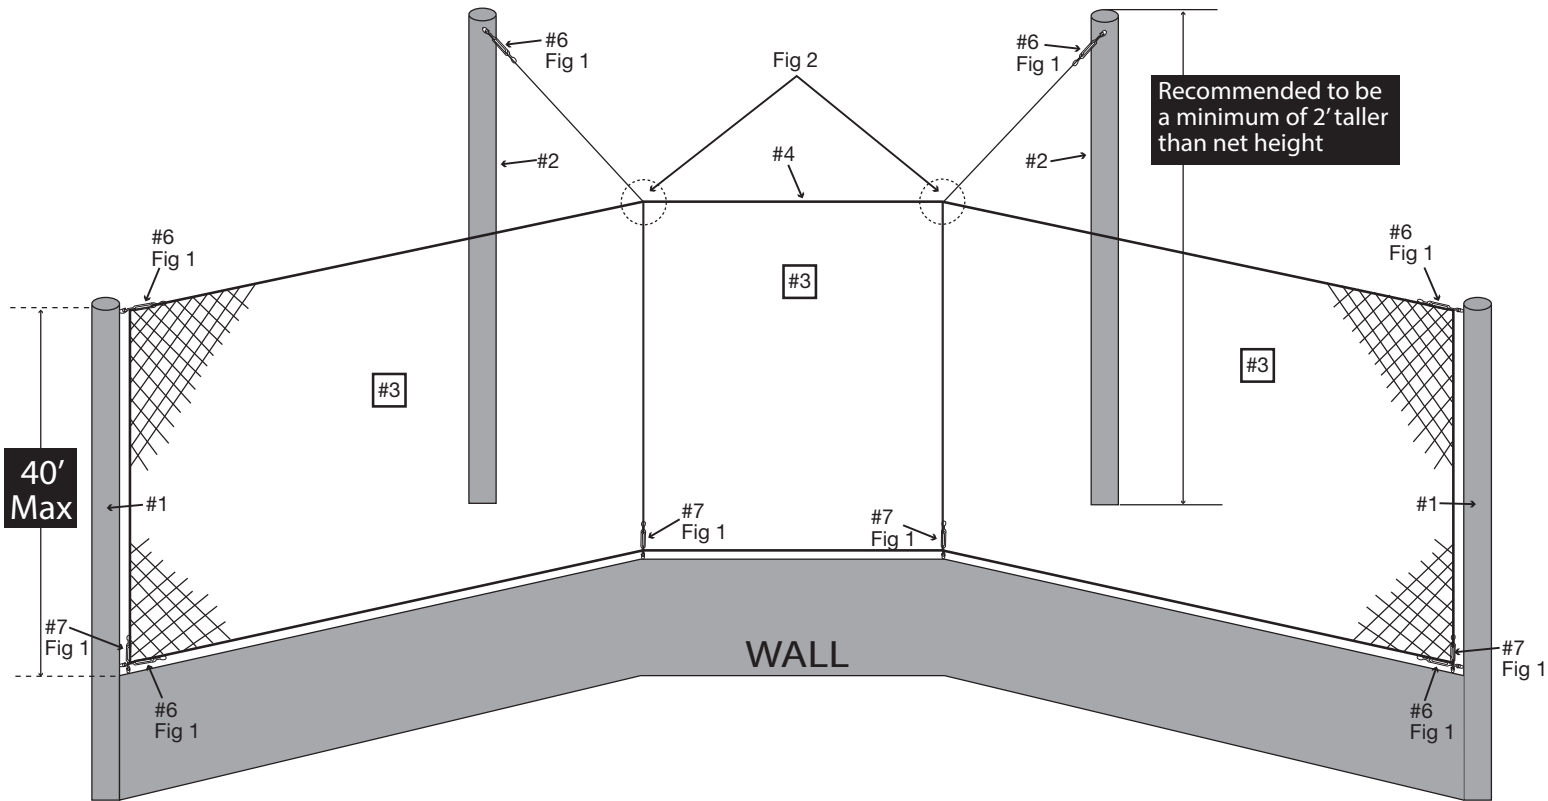


PARTS LIST

UNITS	REF.	DESCRIPTION
(2)	#1	End Poles, 10-3/4"OD x 0.375 Wall Coated Black
(2)	#2	Offset Poles (Minimum 2' taller than end poles)
(3)	#3	Backstop Netting Panels
600'	#4	1/4" GAC Cable
(6)	#5	1/2" x 12" Long Eyebolts
(6)	#6	TB-12 Turnbuckles (for horizontal and pull-back cables)
(4)	#7	TB-6 Turnbuckles (for vertical cables)
(40)	#8	1/4" Cable Clamps
(400)	#9	8 mm Carabiner Clips

NOTE: (IF INSTALLING WITH A WALL)

- Eyebolts are recommended every 3' - 4' on top of wall to anchor bottom cable
- Wall and hardware/eyebolts for wall are not included



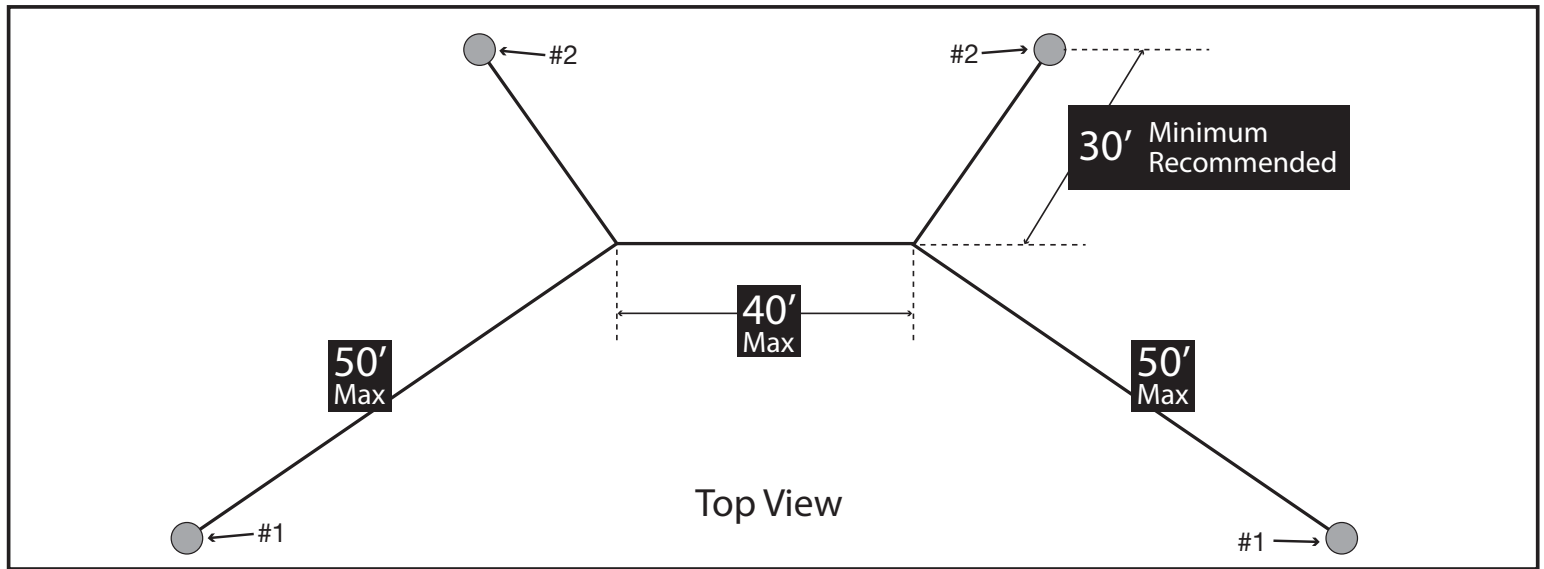


FIGURE 1
HARDWARE ASSEMBLY


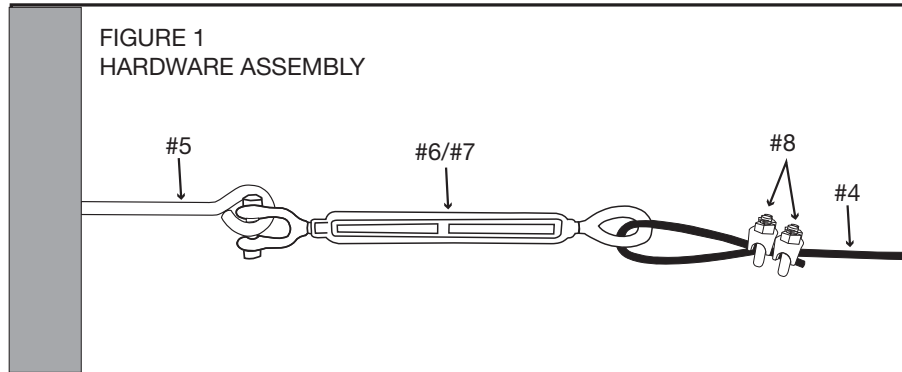


FIGURE 2
HARDWARE ASSEMBLY

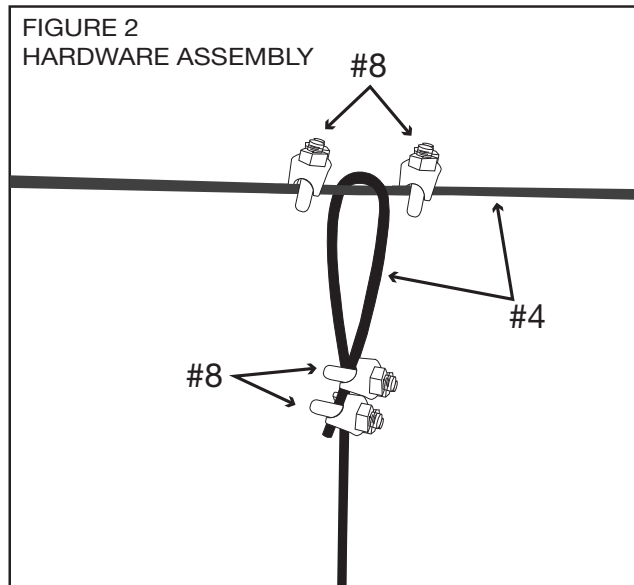

FOOTING INSTALL

NOTE:
These are suggested
footing dimensions.
Consider local soil
conditions to deter-
mine actual size of
foundation

10' Minimum Depth
for 40' Pole Height
8' Minimum Depth
for 30' Pole Height

24" Minimum